


POLYESTER WOVEN TEXTILE LASHING

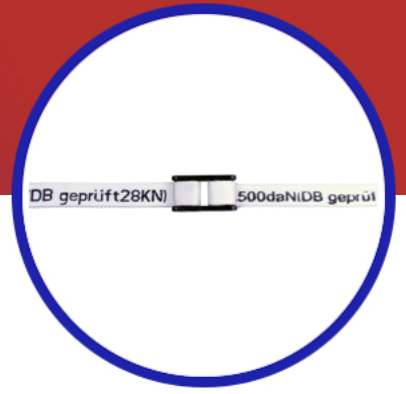

Product Description

One-way cargo securing strapping with a high tensile strength is an economic and easy to handle alternative for conventional tension belts and/or complex wooden crates for load securing. The usage of lashing is steadily increasing as a method for load securing on flat racks and in containers.

Textile lashing belts are made to tie the goods together and to fix them on suitable carriers. In combination with our metal buckles and ratchets, a reliable connection between product and carrier can be established. serving to protect your goods against all damages during transportation.

Our lashing straps are available in bulk woils, in cartons, or in our handy dispenser bag. We offer two standard colours for lashing belts, natural white and orange. Customized printing is available as well!

Key Features

- High tensile strength
- Easy handling with dispenser bag
- Certified by Germanischer Lloyd
- Superior resilience, low elongation
- Combinable with other cargo securing systems e.g. dunnage bags
- Alternative to expensive ratchet straps and bulky binding wire
- DB approved available width 32 mm to 50 mm
- Linear breaking strength available from 2000 to 7500 daN
- One-way strapping for securing (lashing) on flats, rail and in containers

Industries Served

- Logistics
- Engineering and Machinery
- Power and Refinery



STREAM PEAK INTERNATIONAL PTE LTD
Tel: +65 6610 7921 | Fax: +65 6862 2520
Email: enquiry@streampeak.com.sg

Valuing Relationships, Protecting Goods
Address: 26 Tuas South Street 3, S(638026)
Website: www.streampeak.com.sg

Product Specifications

Technical Specifications				
Belt Width	Linear/System	Meters/Bag	Bag/Carton	Carton/Pallet
35mm	1600/2560 daN	370 m	1	30
32mm	2000/3200 daN	250 m	1	30
32mm	2300/3700 daN	250 m	1	30
38mm	3500/5600 daN	200 m	1	30
40mm	5000/8000 daN	200 m	1	30
50mm	2000/3200 daN	150 m	1	30
50mm	5000/8000 daN	150 m	1	30
50mm	6000/9600 daN	100 m	1	30
50mm	7500/12000 daN	100 m	1	30

Note: Linear and breaking strength are tested in laboratory environment.
In open field applications forces and circumstances may cause different results.

Technical Specifications					
Belt Width	Linear/System	Length/Coil	Coils/Bag	Bag/Carton	Carton/Pallet
35mm	1600/2560 daN	370 m	2	2	44
32mm	2000/3200 daN	250 m	2	2	44
32mm	2300/3700 daN	250 m	2	2	48
38mm	3500/5600 daN	200 m	2	2	40
40mm	5000/8000 daN	200 m	1	2	36
50mm	2000/3200 daN	150 m	2	2	48
50mm	5000/8000 daN	150 m	1	2	36
50mm	6000/9600 daN	100 m	1	2	36
50mm	7500/12000 daN	100 m	1	2	36

Related Products



Dunnage Bag



Void Fillers



MegaFlow Venturi System



Dispensers



STREAM PEAK INTERNATIONAL PTE LTD
Tel: +65 6610 7921 | Fax: +65 6862 2520
Email: enquiry@streampeak.com.sg

Valuing Relationships, Protecting Goods
Address: 26 Tuas South Street 3, S(638026)
Website: www.streampeak.com.sg