60G TO 300G INDICATING SILICA GEL FILLED IN-LINE DESICCATORS

Product Description

This In-Line Desiccator is rated for a maximum pressure of 20 psi. This desiccator houses indicating silica gel and has a 25-micron (nominal) outlet filter.

The desiccator is supplied with PVC tubing (1.5 meters long) and tube inserts.

The inlet air must be clean and free from liquid water. The unit is also refillable and can be supplied with alternative connections if required.



Industries Served

- Aerospace
- Defence
- Electronics
- Power & Refinery





STREAM PEAK INTERNATIONAL PTE LTD Tel: +65 6610 7921 | Fax: +65 6862 2520 Email: enquiry@streampeak.com.sg

Valuing Relationships, Protecting Goods Address: 26 Tuas South Street 3, S(638026) Website: www.streampeak.com.sg

Key Features

- · Point of use dry air
- Low cost
- Easy installation
- Available with condition indicator
- Different filtration levels available
- Compression fitting interface
- · Low medium pressure ratings



Product Applications

- Air Exhaust Lines
- Vacuum Lines
- Low Pressure Compressed Air Lines
- Marine Vehicles

Product Specifications

Desiccant Type	Desiccant Capacity	Maximum Working Pressure
Indicating Silica Gel	0.06kg-0.3kg	20 psi

Related Products



Silica Gel



1Kg Molecular Sieves & Silica Gel In-Line Dryer



Humidity Indicator Card




Desiccant Refiils



STREAM PEAK INTERNATIONAL PTE LTD Tel: +65 6610 7921 | Fax: +65 6862 2520 Email: enquiry@streampeak.com.sg

Valuing Relationships, Protecting Goods Address: 26 Tuas South Street 3, S(638026) Website: www.streampeak.com.sg

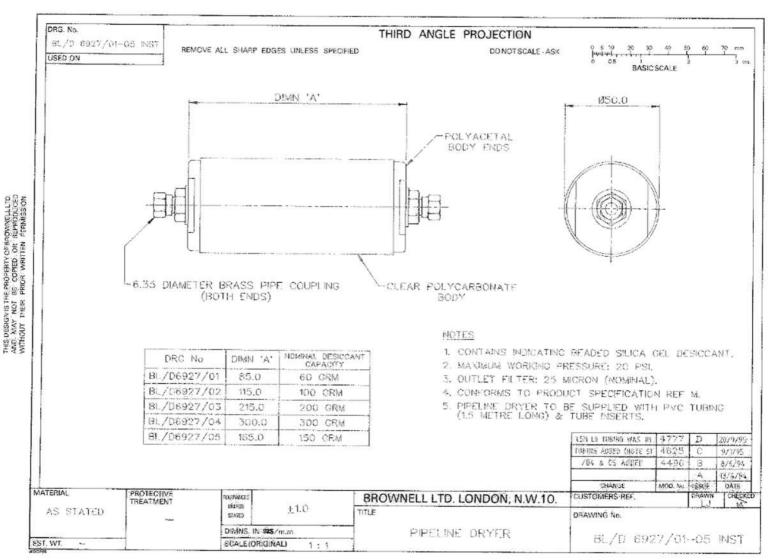

HPC DESktawis that polyhodray An